




78L15 Three-terminal positive voltage regulator SOT-89

FEATURES

- Maximum output current
 $I_{OM}: 0.1A$
- Output voltage
 $V_O: 15V$
- Continuous total dissipation
 $P_D: 0.6 W (T_a= 25\text{ }^\circ\text{C})$



- 1. OUT
- 2. GND
- 3. IN

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	166.7	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_{OPR}	-25~+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=23V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	V_o	25°C	14.4	15	15.6		
		0-125 $^\circ\text{C}$	$17.5V \leq V_i \leq 30V, I_o=1mA-40mA$	14.25	15	15.75	V
			$V_i=23V, I_o=1mA-70mA$	14.25	15	15.75	V
Load Regulation	ΔV_o	$I_o=1mA-100mA, V_i=23V$	25°C		25	150	mV
		$I_o=1mA-40mA, V_i=23V$	25°C		15	75	mV
Line regulation	ΔV_o	$17.5V \leq V_i \leq 30V, I_o=40mA$	25°C		65	300	mV
		$19V \leq V_i \leq 30V, I_o=40mA$	25°C		58	250	mV
Quiescent Current	I_q	25°C		4.6	6.5	mA	
Quiescent Current Change	ΔI_q	$19V \leq V_i \leq 30V, I_o=40mA$	0-125 $^\circ\text{C}$			1.5	mA
	ΔI_q	$1mA \leq I_o \leq 40mA, V_i=23V$	0-125 $^\circ\text{C}$			0.1	mA
Output Noise Voltage	V_N	10Hz $\leq f \leq$ 100KHz	25°C		82	$\mu V/V_o$	
Ripple Rejection	RR	$18.5V \leq V_i \leq 28.5V, f=120Hz$	0-125 $^\circ\text{C}$	34	39		
Dropout Voltage	V_d	25°C		1.7			

* Pulse test.

TYPICAL APPLICATION

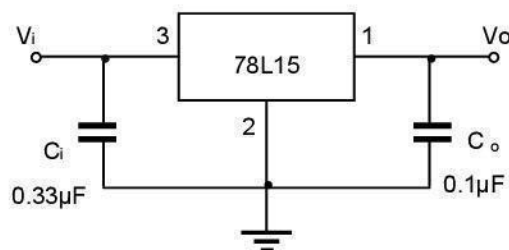

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

